

■ PRODUCT CATALOG LIST



LED Area Post Top Light

1. A wide range of LED area post top lights for various applications, including street lighting, parking lots, and industrial areas.



LED Highbay Light

1. A wide range of LED highbay lights for industrial and commercial applications, providing high lumen output and long life.



LED Street Light

1. A wide range of LED street lights for urban and suburban areas, offering energy efficiency and long life.



LED Solar Area Light

1. A wide range of LED solar area lights for outdoor applications, including parking lots, walkways, and gardens.



LED Stadium Light

1. A wide range of LED stadium lights for sports venues, providing high lumen output and long life.



LED Floodlight/ Tunnel Light

1. A wide range of LED floodlights and tunnel lights for industrial and commercial applications, providing high lumen output and long life.



LED Gas Station/ Canopy Light

1. A wide range of LED gas station and canopy lights for commercial applications, providing high lumen output and long life.



LED Wallpack Light

1. A wide range of LED wallpack lights for outdoor applications, including parking lots, walkways, and gardens.



LED Solar Street Light

1. A wide range of LED solar street lights for outdoor applications, including parking lots, walkways, and gardens.



LED Corn Light/Garden Light

1. A wide range of LED corn lights and garden lights for outdoor applications, including parking lots, walkways, and gardens.



LED Retrofit Kit

1. A wide range of LED retrofit kits for industrial and commercial applications, providing high lumen output and long life.



LED Linear Highbay/ LED Tri-proof Light

1. A wide range of LED linear highbay and tri-proof lights for industrial and commercial applications, providing high lumen output and long life.



LED Growth Light

1. A wide range of LED growth lights for indoor applications, including greenhouses and indoor gardens.



LED Work Light/Temporary Working Light

1. A wide range of LED work lights and temporary working lights for industrial and commercial applications, providing high lumen output and long life.



Adjustable power/color temperature all in one

1. A wide range of adjustable power/color temperature all in one lights for industrial and commercial applications, providing high lumen output and long life.

## LED AREA POST TOP LIGHT

### Specification:

| Model           | Power | Size       |
|-----------------|-------|------------|
| BB-LD-30W-AR-B  |       | Ø111x107mm |
| BB-LD-50W-AR-B  |       | Ø161x130mm |
| BB-LD-75W-AR-B  |       | Ø211x151mm |
| BB-LD-100W-AR-B |       | Ø261x171mm |
| BB-LD-150W-AR-B |       | Ø311x191mm |

### Specification:

| Model           | Power | Size       |
|-----------------|-------|------------|
| BB-LD-50W-AR-B  |       | Ø179x153mm |
| BB-LD-100W-AR-B |       | Ø279x153mm |
| BB-LD-150W-AR-B |       | Ø379x153mm |
| BB-LD-200W-AR-B |       | Ø379x153mm |

### Specification:

| Model            | Power | Size       |
|------------------|-------|------------|
| BB-LD-60W-AR-B2  |       | Ø450x542mm |
| BB-LD-80W-AR-B2  |       | Ø450x542mm |
| BB-LD-100W-AR-B2 |       | Ø450x542mm |
| BB-LD-120W-AR-B2 |       | Ø450x542mm |

### Specification:

| Model           | Power | Size       |
|-----------------|-------|------------|
| BB-LD-30W-AR-H  |       | Ø450x524mm |
| BB-LD-60W-AR-H  |       | Ø450x524mm |
| BB-LD-90W-AR-H  |       | Ø450x524mm |
| BB-LD-120W-AR-H |       | Ø450x524mm |
| BB-LD-150W-AR-H |       | Ø450x524mm |

### Specification:

| Model           | Power | Size       |
|-----------------|-------|------------|
| BB-LD-100W-AR-I |       | Ø620x375mm |
| BB-LD-120W-AR-I |       | Ø620x375mm |
| BB-LD-150W-AR-I |       | Ø620x375mm |

### Specification:

| Model                 | Power | Size       |
|-----------------------|-------|------------|
| BB-LD-30/50/75W       |       | Ø345x503mm |
| BB-LD-75/100/125/150W |       | Ø345x503mm |

Adjustable power/Adjustable color temperature all in one

3 years adjustment: 3000K, 4000K, 5000K

### Specification:

| Model           | Power | Size       |
|-----------------|-------|------------|
| BB-LD-60W-AR-J  |       | Ø365x504mm |
| BB-LD-100W-AR-J |       | Ø365x504mm |
| BB-LD-150W-AR-J |       | Ø365x504mm |

### Specification:

| Model          | Power | Size       |
|----------------|-------|------------|
| BB-LD-30W-AR-E |       | Ø165x138mm |
| BB-LD-50W-AR-E |       | Ø165x138mm |

### Specification:

| Model           | Power | Size          |
|-----------------|-------|---------------|
| BB-LD-200W-AR-F |       | 420°420°463mm |
| BB-LD-240W-AR-F |       | 420°420°463mm |
| BB-LD-320W-AR-F |       | 420°420°463mm |



### Specification:

| Model            | Power | Size       |
|------------------|-------|------------|
| BB-LD-30W-AR-B3  |       | Ø400x700mm |
| BB-LD-50W-AR-B3  |       | Ø400x700mm |
| BB-LD-75W-AR-B3  |       | Ø400x700mm |
| BB-LD-100W-AR-B3 |       | Ø400x700mm |

### Key Features:

- High performance LED fixture 130lm/W
- High precision die casting aluminum, anodic oxidation, higher level of corrosion-proof
- Stable and durable, easy installation and lower maintenance
- Air cooling design IP67 Rated enclosure
- Replacing 100W-1000W Metal Halide
- Optional with photocell
- 5 years warranty

### Installation Method:



### Application:

- Garden lighting.
- Community lighting.
- Campus lighting.
- Parking lot lighting.
- Street lighting.



## LED HIGHTBAY LIGHT

### Specification:

| Model         | Power | Size       |
|---------------|-------|------------|
| BB-GKD-60W-E  | 60W   | Ø220x111mm |
| BB-GKD-100W-E | 100W  | Ø250x164mm |
| BB-GKD-150W-E | 150W  | Ø335x167mm |
| BB-GKD-200W-E | 200W  | Ø410x164mm |
| BB-GKD-240W-E | 240W  | Ø480x172mm |
| BB-GKD-300W-E | 300W  | Ø400x255mm |



### Specification:

| Model                  | Power | Size       |
|------------------------|-------|------------|
| BB-GKD-6075/100/120W   | 60W   | Ø230x174mm |
| BB-GKD-75/100/120/150W | 75W   | Ø340x181mm |

Adjustable power color temperature all in one  
3 years adjustment: 3000K, 4000K, 5000K



### Specification:

| Model         | Power | Size(Cover) |
|---------------|-------|-------------|
| BB-GKD-60W-E  | 60W   | Ø310x187mm  |
| BB-GKD-100W-E | 100W  | Ø310x150mm  |
| BB-GKD-150W-E | 150W  | Ø310x166mm  |
| BB-GKD-200W-E | 200W  | Ø410x205mm  |
| BB-GKD-240W-E | 240W  | Ø410x255mm  |
| BB-GKD-300W-E | 300W  | Ø410x205mm  |
| BB-GKD-400W-E | 400W  | Ø575x205mm  |



### Specification:

| Model          | Power | Size       |
|----------------|-------|------------|
| BB-GKD-180W-E4 | 180W  | Ø250x178mm |
| BB-GKD-150W-E4 | 150W  | Ø300x181mm |
| BB-GKD-200W-E4 | 200W  | Ø345x193mm |



### Specification:

| Model             | Power | Size       |
|-------------------|-------|------------|
| BB-GKD-330W-E5-IC | 330W  | Ø250x110mm |
| BB-GKD-50W-E5-IC  | 50W   | Ø200x110mm |



### Specification:

| Model          | Power | Size       |
|----------------|-------|------------|
| BB-GKD-100W-E3 | 100W  | Ø280x174mm |
| BB-GKD-150W-E3 | 150W  | Ø410x181mm |
| BB-GKD-200W-E3 | 200W  | Ø380x193mm |



### Specification:

| Model             | Power | Size       |
|-------------------|-------|------------|
| BB-GKD-100W-E5-IC | 100W  | Ø250x110mm |
| BB-GKD-150W-E5-IC | 150W  | Ø300x130mm |
| BB-GKD-200W-E5-IC | 200W  | Ø348x130mm |




PC cover or Aluminum cover

### Key Features:

- High performance LED fixture 130lm/W
- High precision die casting aluminum, anodic oxidation, higher level of corrosion-proof
- Stable and durable, easy installation. And lower maintenance
- Air cooling design IP65 Rated enclosure
- Replacing 100W-1000W Metal Halide
- Optional with photocell, Microwavew sensor
- 5 years warranty

### Installation Method:

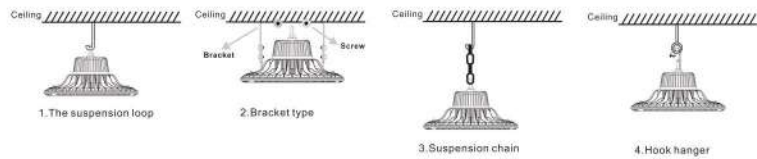

### Application:


- Parking area lighting
- Warehouse lighting
- Factories lighting
- Workshop lighting
- Indoor stadium lighting



Warehouse lighting



Factories lighting

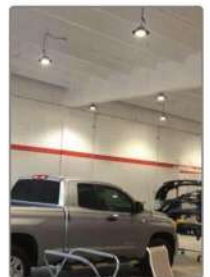

Garage lighting

## LED Street Light

### Specification:

| Model        | Power | Size         |
|--------------|-------|--------------|
| BB-LD-50W-S  | 50W   | 516x250x72mm |
| BB-LD-100W-S | 100W  | 616x250x72mm |
| BB-LD-150W-S | 150W  | 616x250x72mm |



### Specification:

| Model        | Power | Size         |
|--------------|-------|--------------|
| BB-LD-200W-S | 200W  | 816x250x89mm |
| BB-LD-240W-S | 240W  | 816x250x89mm |
| BB-LD-300W-S | 300W  | 816x250x89mm |



### Specification:

| Model                | Power             | Size         |
|----------------------|-------------------|--------------|
| BB-LD-50/80/100/120W | 50W/80W/100W/120W | 616x250x72mm |



### Specification:

| Model                  | Power               | Size         |
|------------------------|---------------------|--------------|
| BB-LD-100/150/200/240W | 100W/150W/200W/240W | 616x250x72mm |



Adjustable power, Adjustable color temperature all in one  
3 gears adjustment: 3000K, 4000K, 5000K.

Adjustable power, Adjustable color temperature all in one  
3 gears adjustment: 3000K, 4000K, 5000K.

### Specification:

| Model         | Power | Size         |
|---------------|-------|--------------|
| BB-LD-100W-S2 | 100W  | 536x216x70mm |
| BB-LD-100W-S2 | 100W  | 536x216x70mm |
| BB-LD-240W-S2 | 240W  | 625x316x70mm |
| BB-LD-300W-S2 | 300W  | 710x316x80mm |



### Specification:

| Model         | Power | Size         |
|---------------|-------|--------------|
| BB-LD-50W-S3  | 50W   | 580*200*88mm |
| BB-LD-100W-S3 | 100W  | 610*245*98mm |
| BB-LD-150W-S3 | 150W  | 660*245*98mm |
| BB-LD-200W-S3 | 200W  | 712*300*98mm |
| BB-LD-300W-S3 | 300W  | 714*340*98mm |



### Specification:

| Model         | Power | Size          |
|---------------|-------|---------------|
| BB-LD-50W-S4  | 50W   | 568*200*119mm |
| BB-LD-100W-S4 | 100W  | 613*240*119mm |
| BB-LD-150W-S4 | 150W  | 660*260*119mm |
| BB-LD-200W-S4 | 200W  | 693*300*119mm |
| BB-LD-300W-S4 | 300W  | 793*300*119mm |



### Specification:

| Model         | Power | Size         |
|---------------|-------|--------------|
| BB-LD-50W-S6  | 50W   | 463*173*87mm |
| BB-LD-100W-S6 | 100W  | 611*240*89mm |
| BB-LD-150W-S6 | 150W  | 660*250*89mm |



### Specification:

| Model         | Power | Size          |
|---------------|-------|---------------|
| BB-LD-50W-S7  | 50W   | 522*200*130mm |
| BB-LD-100W-S7 | 100W  | 508*291*154mm |
| BB-LD-150W-S7 | 150W  | 569*291*154mm |
| BB-LD-200W-S7 | 200W  | 660*307*154mm |
| BB-LD-300W-S7 | 300W  | 842*307*154mm |



### Specification:

| Model         | Power | Size          |
|---------------|-------|---------------|
| BB-LD-50W-S5  | 50W   | 460*230*180mm |
| BB-LD-100W-S5 | 100W  | 585*290*185mm |
| BB-LD-150W-S5 | 150W  | 645*290*185mm |




### Key Features:

- High performance LED fixture 130lm/W
- High precision die casting aluminum, anodic oxidation, higher level of corrosion-proof.
- Stable and durable, easy installation and lower maintenance
- Air cooling design Ip67 Rated enclosure
- Replacing 100W-1000W Metal Halide
- Optional with photocell, Microwave sensor
- 5 years warranty

### Optional type:



### Installation Method:

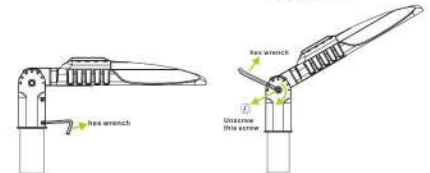

### Application:

- Area lighting/Street lighting
- Industrial lighting
- Stadium lighting
- Port wharf lighting
- Roadway lighting



Street scenes lighting



Roadway lighting



Roadway lighting

## LED Solar Area Lights

### Specification:

| Model            | Power | Size       |
|------------------|-------|------------|
| BB-SLD-15W-AR-B  |       | Φ405x535mm |
| BB-SLD-20W-AR-B  |       | Φ405x535mm |
| BB-SLD-25W-AR-B  |       | Φ540x529mm |
| BB-SLD-40W-AR-B  |       | Φ540x529mm |
| BB-SLD-50W-AR-B  |       | Φ550x529mm |
| BB-SLD-100W-AR-B |       | Φ550x529mm |



### Specification:

| Model            | Power | Size         |
|------------------|-------|--------------|
| BB-SLD-15W-AR-C  |       | 410x365x41mm |
| BB-SLD-20W-AR-C  |       | 410x365x41mm |
| BB-SLD-25W-AR-C  |       | 410x365x41mm |
| BB-SLD-40W-AR-C  |       | 410x365x41mm |
| BB-SLD-50W-AR-C  |       | 680x510x41mm |
| BB-SLD-80W-AR-C  |       | 680x510x41mm |
| BB-SLD-100W-AR-C |       | 680x510x41mm |



### Specification:

| Model             | Power | Size       |
|-------------------|-------|------------|
| BB-SLD-15W-AR-BB  |       | Φ405x52mm  |
| BB-SLD-20W-AR-BB  |       | Φ405x52mm  |
| BB-SLD-25W-AR-BB  |       | Φ540x571mm |
| BB-SLD-40W-AR-BB  |       | Φ540x571mm |
| BB-SLD-50W-AR-BB  |       | Φ550x571mm |
| BB-SLD-80W-AR-BB  |       | Φ550x580mm |
| BB-SLD-100W-AR-BB |       | Φ550x580mm |



### Specification:

| Model             | Power | Size         |
|-------------------|-------|--------------|
| BB-SLD-15W-AR-CS  |       | 393x365x53mm |
| BB-SLD-20W-AR-CS  |       | 393x365x53mm |
| BB-SLD-25W-AR-CS  |       | 393x365x53mm |
| BB-SLD-40W-AR-CS  |       | 393x365x53mm |
| BB-SLD-50W-AR-CS  |       | 510x476x18mm |
| BB-SLD-80W-AR-CS  |       | 510x476x18mm |
| BB-SLD-100W-AR-CS |       | 510x476x18mm |



### Specification:

| Model            | Power | Size       |
|------------------|-------|------------|
| BB-SLD-5W-AR-B4  |       | Φ200x495mm |
| BB-SLD-10W-AR-B4 |       | Φ200x495mm |



### Specification:

| Model            | Power | Size       |
|------------------|-------|------------|
| BB-SLD-5W-AR-B4  |       | Φ200x394mm |
| BB-SLD-10W-AR-B4 |       | Φ200x394mm |



### Specification:

| Model            | Power | Size           |
|------------------|-------|----------------|
| BB-SLD-5W-AR-B4  |       | Φ250x743-954mm |
| BB-SLD-10W-AR-B4 |       | Φ250x743-954mm |



### Application:

- Area lighting/Street lighting
- Industrial lighting
- Stadium lighting
- Port wharf lighting
- Roadway lighting
- Airports lighting



## LED Solar Street Light

### Specification:

| Model          | Power | Size          |
|----------------|-------|---------------|
| BB-SLD-50W-A2  |       | 615*365*160mm |
| BB-SLD-80W-A2  |       | 720*365*160mm |
| BB-SLD-100W-A2 |       | 830*365*160mm |



### Specification:

| Model          | Power | Size           |
|----------------|-------|----------------|
| BB-SLD-100W-A3 |       | 887*430*280mm  |
| BB-SLD-150W-A3 |       | 1160*400*280mm |
| BB-SLD-200W-A3 |       | 1435*400*280mm |



### Specification:

| Model         | Power | Size          |
|---------------|-------|---------------|
| BB-LD-ST-10W  |       | 400*220*50mm  |
| BB-LD-ST-15W  |       | 460*220*50mm  |
| BB-LD-ST-20W  |       | 470*300*50mm  |
| BB-LD-ST-30W  |       | 670*320*50mm  |
| BB-LD-ST-40W  |       | 840*370*50mm  |
| BB-LD-ST-60W  |       | 1030*370*44mm |
| BB-LD-ST-80W  |       | 1140*425*44mm |
| BB-LD-ST-100W |       | 1400*540*44mm |
| BB-LD-ST-120W |       | 1400*540*44mm |



### Specification:

| Model          | Power | Size           |
|----------------|-------|----------------|
| BB-SLD-100W-A3 |       | 887*430*280mm  |
| BB-SLD-150W-A3 |       | 1160*400*280mm |
| BB-SLD-200W-A3 |       | 1435*400*280mm |



### Key Features:

- The company's patented product adopts the integrated design of A-type Sanyuanli battery pack and lamp body controller.
- Fully automatic intelligent light control, time control, remote control function, charging during the day and automatically lighting at night.
- It adopts one-piece aluminum casing, imported high-efficiency light source, full power solar panel, anti-corrosion, waterproof and lightning protection.
- This product is specially designed for outdoor outdoor lighting, easy to install. Solar power supply, 0 wiring, nail wall, pole, holding cement column and other installation methods.
- Suitable for highways, town roads, street lights, rural roads, park lights, courtyard lighting, channel lighting, farms, etc.
- This product solar panel energy efficiency conversion rate of 18% or more, normal sunshine charging more than 8 hours, can supply 3-4 rainy days. Evening (12 hours per night). High temperature resistance 80 degrees, low temperature resistance minus 20 degrees.

### Application:



## LED Stadium Light



### Specification:

| Model          | Power         | Size |
|----------------|---------------|------|
| BB-LD-300W-Q1  | 463°400°220mm |      |
| BB-LD-400W-Q1  | 530°430°252mm |      |
| BB-LD-500W-Q1  | 652°562°352mm |      |
| BB-LD-600W-Q1  | 652°562°352mm |      |
| BB-LD-800W-Q1  | 786°640°398mm |      |
| BB-LD-1000W-Q1 | 786°640°398mm |      |



### Specification:

| Model            | Power          | Size |
|------------------|----------------|------|
| BB-LD-450W-Q2-A  | 563°530°13mm   |      |
| BB-LD-900W-Q2-A  | 605°648°603mm  |      |
| BB-LD-1350W-Q2-A | 666°733°685mm  |      |
| BB-LD-1800W-Q2-A | 1106°484°600mm |      |



### Specification:

| Model         | Power         | Size |
|---------------|---------------|------|
| BB-LD-480W-Q  | 604°414°658mm |      |
| BB-LD-720W-Q  | 603°414°850mm |      |
| BB-LD-960W-Q  | 696°414°850mm |      |
| BB-LD-1200W-Q | 949°414°850mm |      |



### Specification:

| Model         | Power         | Size |
|---------------|---------------|------|
| BB-LD-480W-Q  | 696°414°858mm |      |
| BB-LD-720W-Q  | 603°414°850mm |      |
| BB-LD-960W-Q  | 696°414°850mm |      |
| BB-LD-1200W-Q | 949°414°858mm |      |



### Specification:

| Model          | Power          | Size |
|----------------|----------------|------|
| BB-LD-200W-Q3  | L436°W323°H111 |      |
| BB-LD-300W-Q3  | L436°W418°H111 |      |
| BB-LD-400W-Q3  | L436°W525°H111 |      |
| BB-LD-500W-Q3  | L436°W747°H111 |      |
| BB-LD-800W-Q3  | L850°W588°H188 |      |
| BB-LD-1200W-Q3 | L809°W799°H144 |      |



### Specification:

| Model         | Power          | Size |
|---------------|----------------|------|
| BB-LD-300W-Q4 | L448°W321°H883 |      |
| BB-LD-600W-Q4 | L537°W373°H981 |      |




### Specification:

| Model          | Power          | Size |
|----------------|----------------|------|
| BB-LD-300W-Q5  | L398°W418°H266 |      |
| BB-LD-1000W-Q5 | L779°W549°H378 |      |

## Key Features:

- High performance LED fixture 130lm/W
- High precision die casting aluminum, anodic oxidation, higher level of corrosion-proof
- Stable and durable, easy installation and lower maintenance
- Air cooling design, IP66 Rated enclosure
- Replacing 1500W-6000W Metal Halide
- Beam Angle is complete which can meet all Angle requirements
- Thermal Control Technology. Using advanced finite element analysis technology to optimize product heat dissipation structure design
- 5 years warranty

## Installation Method:

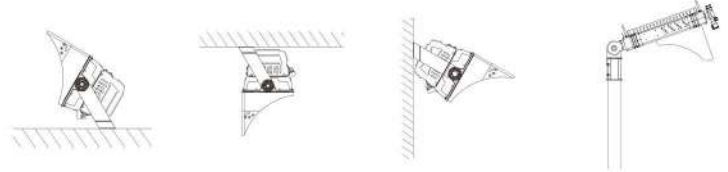

## Application:

- Outdoor stadium
- Indoor stadium
- Golf course
- Football field
- Rugby field
- Outdoor/Indoor basketball court



## LED Floodlight/ Tunnel Light



### Specification:

| Model        | Power | Size     |
|--------------|-------|----------|
| BB-LD-50W-S  | 547   | 250*74mm |
| BB-LD-100W-S | 547   | 250*74mm |
| BB-LD-150W-S | 547   | 250*74mm |
| BB-LD-200W-S | 547   | 250*74mm |
| BB-LD-240W-S | 547   | 420*90mm |
| BB-LD-300W-S | 547   | 420*90mm |



### Specification:

| Model        | Power | Size     |
|--------------|-------|----------|
| BB-FL-10W-E  | 160   | 107*32mm |
| BB-FL-20W-E  | 216   | 152*40mm |
| BB-FL-30W-E  | 226   | 167*40mm |
| BB-FL-50W-E  | 310   | 220*50mm |
| BB-FL-80W-E  | 349   | 240*50mm |
| BB-FL-100W-E | 402   | 245*50mm |
| BB-FL-150W-E | 435   | 260*50mm |
| BB-FL-200W-E | 470   | 260*50mm |
| BB-FL-300W-E | 563   | 275*50mm |
| BB-FL-400W-E | 585   | 309*70mm |



### Specification:

| Model         | Power | Size      |
|---------------|-------|-----------|
| BB-LD-100W-S1 | 420   | 370*105mm |
| BB-LD-150W-S1 | 420   | 370*105mm |
| BB-LD-200W-S1 | 540   | 370*105mm |
| BB-LD-300W-S1 | 670   | 370*105mm |



### Specification:

| Model          | Power | Size     |
|----------------|-------|----------|
| BB-LD-80W-FL-D | 322   | 229*73mm |
| BB-LD-80W-FL-D | 322   | 267*73mm |

BB-LD-50W-S

### Specification:

| Model           | Power | Size      |
|-----------------|-------|-----------|
| BB-MBD-250W-Q4  | 180   | 197*200mm |
| BB-MBD-500W-Q4  | 630   | 240*200mm |
| BB-MBD-750W-Q4  | 630   | 240*200mm |
| BB-MBD-1000W-Q4 | 630   | 240*200mm |
| BB-MBD-1250W-Q4 | 630   | 240*200mm |
| BB-MBD-1500W-Q4 | 630   | 240*200mm |




| Model            | Power | Size      |
|------------------|-------|-----------|
| BB-MBD-500W-A1   | 95    | 315*130mm |
| BB-MBD-1000W-A1  | 190   | 315*130mm |
| BB-MBD-1500W-A1  | 285   | 315*130mm |
| BB-MBD-2000W-A1  | 370   | 315*130mm |
| BB-MBD-2500W-A1  | 455   | 285*130mm |
| BB-MBD-3000W-A1  | 272   | 570*130mm |
| BB-MBD-4000W-A1  | 370   | 570*130mm |
| BB-MBD-5000W-A1  | 470   | 570*130mm |
| BB-MBD-6000W-A1  | 570   | 570*130mm |
| BB-MBD-8000W-A1  | 740   | 570*130mm |
| BB-MBD-9000W-A1  | 840   | 570*130mm |
| BB-MBD-10000W-A1 | 840   | 570*130mm |
| BB-MBD-12500W-A1 | 716   | 907*130mm |
| BB-MBD-15000W-A1 | 848   | 907*130mm |



### Key Features:

- High performance LED fixture 130lm/W
- High precision die casting aluminum, anodic oxidation, higher level of corrosion-proof
- Stable and durable, easy installation and lower maintenance
- Air cooling design Ip66 Rated enclosure
- Replacing 30W-6000W Metal Halide
- Beam Angle is complete which can meet all Angle requirements
- Replace conventional Flood Lights
- 5 years warranty

### Installation Method:



### Application:

- Outdoor stadium
- Indoor stadium
- Golf course
- Football field
- Rugby field
- Tunnel Lighting



## LED Gas Station/ Canopy Light



**Specification:**

| Model          | Power | Size         |
|----------------|-------|--------------|
| BB-CSD-60W-C1  | 60W   | 420*420*67mm |
| BB-CSD-100W-C1 | 100W  | 420*420*67mm |
| BB-CSD-150W-C1 | 150W  | 420*420*67mm |
| BB-CSD-200W-C1 | 200W  | 540*540*67mm |
| BB-CSD-240W-C1 | 240W  | 540*540*67mm |
| BB-CSD-300W-C1 | 300W  | 540*540*67mm |



**Specification:**

| Model          | Power | Size         |
|----------------|-------|--------------|
| BB-CSD-100W-G2 | 100W  | 350*350*30mm |
| BB-CSD-150W-G2 | 150W  | 350*350*30mm |
| BB-CSD-200W-G2 | 200W  | 350*350*30mm |



**Specification:**

| Model          | Power | Size         |
|----------------|-------|--------------|
| BB-CSD-40W-G4  | 40W   | 280*280*48mm |
| BB-CSD-60W-G4  | 60W   | 280*280*48mm |
| BB-CSD-90W-G4  | 90W   | 280*280*48mm |
| BB-CSD-100W-G4 | 100W  | 382*382*49mm |
| BB-CSD-120W-G4 | 120W  | 382*382*49mm |
| BB-CSD-150W-G4 | 150W  | 382*382*49mm |



**Specification:**

| Model         | Power | Size         |
|---------------|-------|--------------|
| BB-CSD-60W-M  | 60W   | 420x420x82mm |
| BB-CSD-100W-M | 100W  | 420x420x82mm |
| BB-CSD-150W-M | 150W  | 420x420x82mm |
| BB-CSD-200W-M | 200W  | 420x420x82mm |
| BB-CSD-250W-M | 250W  | 420x420x82mm |



**Specification:**

| Model          | Power | Size          |
|----------------|-------|---------------|
| BB-CSD-200W-G3 | 200W  | 480x480x259mm |



**Specification:**

| Model         | Power | Size         |
|---------------|-------|--------------|
| BB-CSD-50W-H  | 50W   | 245x245x85mm |
| BB-CSD-75W-H  | 75W   | 245x245x85mm |
| BB-CSD-100W-H | 100W  | 314x314x95mm |
| BB-CSD-120W-H | 120W  | 314x314x95mm |



**Specification:**

| Model                 | Power          | Size         |
|-----------------------|----------------|--------------|
| BB-CSD-20/30/40/60W   | 20/30/40/60W   | 262x262x73mm |
| BB-CSD-60/80/100/120W | 60/80/100/120W | 352x352x82mm |



**Specification:**

| Model                    | Power             | Size     |
|--------------------------|-------------------|----------|
| BB-CSD-40/60/80/100/120W | 40/60/80/100/120W | 306x72mm |

Adjustable power, Adjustable color temperature all in one  
3 gears adjustment: 3000K, 4000K, 5000K.

Adjustable power, Adjustable color temperature all in one  
3 gears adjustment: 3000K, 4000K, 5000K.



**Specification:**

| Model       | Power | Size          |
|-------------|-------|---------------|
| BB-CSD-150W | 150W  | 415x405x141mm |
| BB-CSD-200W | 200W  | 415x405x141mm |



**Specification:**

| Model                   | Power            | Size         |
|-------------------------|------------------|--------------|
| BB-CSD-80/100/120/150W  | 80/100/120/150W  | 420x420x67mm |
| BB-CSD-120/160/200/240W | 120/160/200/240W | 540x540x67mm |

Adjustable power, Adjustable color temperature all in one  
3 gears adjustment: 3000K, 4000K, 5000K.

### Key Features:

- High performance LED fixture 130lm/W
- Imported original CREE XTE or Lumileds 3030 LED Chip
- Variety of mounting options
- The surface of lamp housing is anti-corrosion and electrophoresis processed.
- Dust-proof, moisture proof and waterproof. IP65 rated
- Excellent optics design, higher luminous efficiency, uniform light spot, high efficiency, low glare
- Compare to traditional lamps can save energy 70%-80%
- Easy & quick Installation


### Installation Method:



ATYLE 1: Ceiling installation



ATYLE 2: American installation

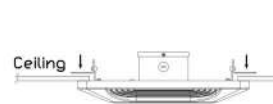

ATYLE 3: Embedded installation

### Application:

- Gas station lighting.
- Petroleum canopies lighting.
- CNG fueling stations lighting.
- Low-medium bay general lighting.
- Soffits lighting.
- Garage lighting.



## LED Wallpack Light

### Specification:

| Model         | Power | Size          |
|---------------|-------|---------------|
| BB-RSD-40W-B  | 40W   | 363x234x196mm |
| BB-RSD-60W-B  | 60W   | 363x234x196mm |
| BB-RSD-80W-B  | 80W   | 363x234x196mm |
| BB-RSD-100W-B | 100W  | 363x234x196mm |
| BB-RSD-120W-B | 120W  | 363x234x196mm |
| BB-RSD-140W-B | 140W  | 363x234x196mm |

### Specification:

| Model              | Power       | Size          |
|--------------------|-------------|---------------|
| BB-RSD-75/100/120W | 75/100/120W | 320x132x115mm |

Adjustable power, Adjustable color temperature all in one  
3 gears adjustment: 3000K, 4000K, 5000K.

### Specification:

| Model          | Power | Size          |
|----------------|-------|---------------|
| BB-RSD-30W-C1  | 30W   | 201x197x90mm  |
| BB-RSD-70W-C1  | 70W   | 265x240x160mm |
| BB-RSD-100W-C1 | 100W  | 295x240x190mm |

### Specification:

| Model         | Power | Size          |
|---------------|-------|---------------|
| BB-RSD-40W-B3 | 40W   | 290x176x130mm |
| BB-RSD-60W-B3 | 60W   | 290x176x130mm |

### Specification:

| Model          | Power | Size          |
|----------------|-------|---------------|
| BB-RSD-30W-B2  | 30W   | 320x132x115mm |
| BB-RSD-55W-B2  | 55W   | 320x132x115mm |
| BB-RSD-80W-B2  | 80W   | 320x132x115mm |
| BB-RSD-100W-B2 | 100W  | 320x132x115mm |

### Specification:

| Model         | Power | Size          |
|---------------|-------|---------------|
| BB-RSD-90W-C  | 90W   | 322x205x241mm |
| BB-RSD-100W-C | 100W  | 322x205x241mm |

### Specification:

| Model           | Power | Size      |
|-----------------|-------|-----------|
| BB-RSD-2*3W-C3  | 6W    | 65*180mm  |
| BB-RSD-2*1W-C3  | 2W    | 90*200mm  |
| BB-RSD-2*15W-C3 | 30W   | 110*200mm |
| BB-RSD-2*15W-C3 | 30W   | 140*300mm |
| BB-RSD-2*18W-C3 | 36W   | 145*300mm |
| BB-RSD-2*20W-C3 | 40W   | 160*300mm |


### Specification:

| Model          | Power | Size          |
|----------------|-------|---------------|
| BB-RSD-45W-B4  | 45W   | 333x199x250mm |
| BB-RSD-60W-B4  | 60W   | 333x199x250mm |
| BB-RSD-80W-B4  | 80W   | 333x199x250mm |
| BB-RSD-100W-B4 | 100W  | 333x199x250mm |
| BB-RSD-120W-B4 | 120W  | 333x199x250mm |
| BB-RSD-140W-B4 | 140W  | 333x199x250mm |

### Key Features:

- High performance LED fixture 130lm/W
- High precision die casting aluminum, anodic oxidation, higher level of corrosion-proof
- Stable and durable, easy installation and lower maintenance
- Air cooling design Ip66 Rated enclosure
- Replacing 30W-300W Metal Halide
- ETL CETL CE ROHS listed
- 5 years warranty

### Installation Method:

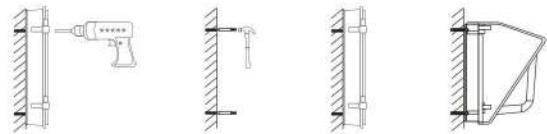

### Application:

- Parking lot Lighting.
- Garden yard Lighting.
- Outdoor Building Lighting.
- High/Low Bay Lighting.
- Building facades lighting.
- Sidewalks lighting.



## LED Solar Street Light

### Specification:



| Model          | Power | Size          |
|----------------|-------|---------------|
| BB-SLD-50W-A2  |       | 910*300*100mm |
| BB-SLD-80W-A2  |       | 720*360*160mm |
| BB-SLD-100W-A2 |       | 930*360*160mm |



### Specification:



| Model          | Power | Size           |
|----------------|-------|----------------|
| BB-SLD-100W-A3 |       | 887*400*260mm  |
| BB-SLD-150W-A3 |       | 1160*400*260mm |
| BB-SLD-200W-A3 |       | 1435*400*280mm |

### Specification:



| Model         | Power | Size           |
|---------------|-------|----------------|
| BB-SLD-40W-A4 |       | 760*430*100mm  |
| BB-SLD-50W-A4 |       | 910*430*150mm  |
| BB-SLD-60W-A4 |       | 1160*430*150mm |



### Specification:



| Model         | Power | Size          |
|---------------|-------|---------------|
| BB-SLD-20W-A6 |       | 800*410*153mm |
| BB-SLD-30W-A6 |       | 800*410*153mm |
| BB-SLD-40W-A6 |       | 800*410*153mm |

### Specification:



| Model          | Power | Size         |
|----------------|-------|--------------|
| BB-SLD-80W-G2  |       | 513*302*50mm |
| BB-SLD-100W-G2 |       | 730*320*50mm |




### Key Features:

- Fully automatic intelligent light control, time control, remote control function, charging during the day and automatically.
- It adopts one-piece aluminum casing, imported high-efficiency light source, full power solar panel, anti-corrosion, waterproof and lightning protection.
- This product is specially designed for outdoor outdoor lighting, easy to install. Solar power supply, 0 wiring, nail wall, pole, holding cement column and other installation methods.
- Suitable for highways, town roads, street lights, rural roads, park lights, courtyard lighting, channel lighting, farms, etc.
- 5 years warranty.

### Installation Method:



1.Round pole Mounting

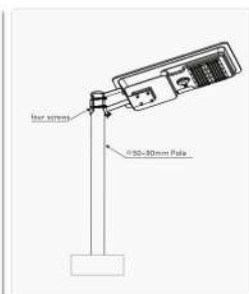

2.Bracket Mounting

### Application:

- Parking lot Lighting.
- Street lighting
- Courtyard lighting
- Campus lighting
- Stadium lighting
- Park lighting



## LED Corn Light/Garden Light



### Specification:

| Model         | Power | Size       |
|---------------|-------|------------|
| BB-HJD-20W-P  |       | Ø100*215mm |
| BB-HJD-30W-P  |       | Ø100*215mm |
| BB-HJD-40W-P  |       | Ø100*215mm |
| BB-HJD-50W-P  |       | Ø100*250mm |
| BB-HJD-60W-P  |       | Ø100*250mm |
| BB-HJD-80W-P  |       | Ø125*271mm |
| BB-HJD-100W-P |       | Ø125*281mm |
| BB-HJD-120W-P |       | Ø125*331mm |
| BB-HJD-150W-P |       | Ø125*331mm |



### Specification:

| Model        | Power | Size      |
|--------------|-------|-----------|
| BB-HJD-8W-P  |       | Ø130*45mm |
| BB-HJD-8W-P  |       | Ø130*45mm |
| BB-HJD-10W-P |       | Ø145*45mm |
| BB-HJD-12W-P |       | Ø165*45mm |
| BB-HJD-15W-P |       | Ø175*45mm |



### Specification:

| Model        | Power | Size       |
|--------------|-------|------------|
| BB-HJD-30W-D |       | Ø120*183mm |
| BB-HJD-40W-D |       | Ø125*183mm |
| BB-HJD-50W-D |       | Ø125*183mm |
| BB-HJD-60W-D |       | Ø125*183mm |
| BB-HJD-80W-D |       | Ø125*183mm |



### Specification:

| Model        | Power | Size       |
|--------------|-------|------------|
| BB-HJD-30W-D |       | Ø150*185mm |
| BB-HJD-40W-D |       | Ø150*185mm |
| BB-HJD-50W-D |       | Ø150*185mm |
| BB-HJD-60W-D |       | Ø150*185mm |
| BB-HJD-80W-D |       | Ø150*185mm |




### Specification:

| Model        | Power | Size      |
|--------------|-------|-----------|
| BB-HJD-30W-F |       | Ø80*205mm |
| BB-HJD-40W-F |       | Ø80*205mm |
| BB-HJD-50W-F |       | Ø80*205mm |

### Key Features:

- High performance LED fixture 130lm/W
- MH/HPS/HID/MHL/CFL lamp retrofit
- Screw Base Direct Install by bypass ballast
- 100% Die Casting Heat Sink
- Universal Base E26/E27/E39/E40/EX39
- ETL CETL CE ROHS listed
- Stable and durable, easy installment and maintenance

### Installation Method:

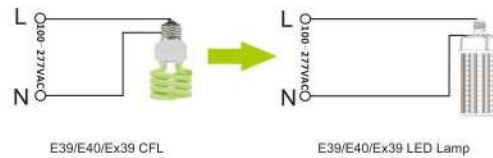

### Application:

- Sports Light/Post Top Light.
- Roadway Light/Street Light/Billboard Light.
- Flood Light/Pole Light.
- Other application roadway.
- High/Low Bay Light

## LED Retrofit Kit



### Specification:

| Model          | Power | Size      |
|----------------|-------|-----------|
| BB-LD-SDO-60W  |       | 270*145mm |
| BB-LD-SDO-80W  |       | 270*145mm |
| BB-LD-SDO-100W |       | 270*190mm |
| BB-LD-SDO-120W |       | 270*190mm |
| BB-LD-SDO-150W |       | 270*190mm |
| BB-LD-SDO-240W |       | 450*330mm |
| BB-LD-SDO-300W |       | 450*330mm |



### Specification:

| Model       | Power | Size       |
|-------------|-------|------------|
| BB-YPD-60W  |       | Ø300*350mm |
| BB-YPD-80W  |       | Ø300*350mm |
| BB-YPD-100W |       | Ø300*350mm |
| BB-YPD-120W |       | Ø300*350mm |
| BB-YPD-150W |       | Ø300*350mm |
| BB-YPD-370W |       | Ø365*340mm |
| BB-YPD-480W |       | Ø300*340mm |

### Specification:

| Model               | Power | Size      |
|---------------------|-------|-----------|
| BB-SDO-60W/100/120W |       | 270*190mm |

Adjustable power Adjustable color temperature all in one  
3 gears adjustment: 3000K, 4000K, 5000K.



## LED Linear Highbay/Tri-proof Light



### Specification:

| Model              | Power | Size          |
|--------------------|-------|---------------|
| BB-QKD-A2-3FT-100W | 100W  | 600*158*76mm  |
| BB-QKD-A2-3FT-150W | 150W  | 600*158*76mm  |
| BB-QKD-A2-3FT-200W | 200W  | 600*158*76mm  |
| BB-QKD-A2-4FT-240W | 240W  | 1216*140*75mm |
| BB-QKD-A2-4FT-320W | 320W  | 1216*140*75mm |

### Specification:

| Model             | Power | Size           |
|-------------------|-------|----------------|
| BB-QKD-60W-2-4FT  | 240W  | 3FT:790x293mm  |
| BB-QKD-100W-2-4FT | 240W  | 4FT:1173x293mm |
| BB-QKD-150W-2-4FT | 240W  |                |
| BB-QKD-200W-2-4FT | 240W  |                |
| BB-QKD-300W-2-4FT | 240W  |                |

### Specification:

| Model              | Power | Size        |
|--------------------|-------|-------------|
| BB-RTGD-25W-A-23-D | 25W   | 600*90*45mm |
| BB-RTGD-40W-A-23-D | 40W   | 600*90*45mm |

### Specification:

| Model              | Power | Size         |
|--------------------|-------|--------------|
| BB-RTGD-35W-A-24-D | 35W   | 1213*90*45mm |
| BB-RTGD-50W-A-24-D | 50W   | 1213*90*45mm |



### Specification:

| Model                | Power | Size           |
|----------------------|-------|----------------|
| BB-QKD-60W-2-4FT-AQ  | 240W  | 3FT:790x293mm  |
| BB-QKD-100W-2-4FT-AQ | 240W  | 4FT:1173x293mm |
| BB-QKD-150W-2-4FT-AQ | 240W  |                |
| BB-QKD-200W-2-4FT-AQ | 240W  |                |
| BB-QKD-300W-2-4FT-AQ | 240W  |                |

### Specification:

| Model              | Power | Size          |
|--------------------|-------|---------------|
| BB-RTGD-25W-A-14-D | 25W   | 1213*303*59mm |
| BB-RTGD-40W-A-14-D | 40W   | 1213*303*59mm |

### Specification:

| Model           | Power | Size         |
|-----------------|-------|--------------|
| BB-RTGD-XFT-30W | 30W   | 900*93*48mm  |
| BB-RTGD-XFT-30W | 30W   | 900*93*48mm  |
| BB-RTGD-XFT-60W | 60W   | 1200*93*48mm |
| BB-RTGD-XFT-60W | 60W   | 1200*93*48mm |
| BB-RTGD-XFT-60W | 60W   | 1500*93*48mm |

### Key Features:

- High performance LED fixture 130lm/W
- Replace conventional Linear Highbay Lights
- Precision Die Cast Aluminum Housing
- Fade Resistant Powder Coat Finish
- Stable and durable, easy installation and lower maintenance

### Installation Method:

#### • Suspension chain mounting



#### • Ceiling installation



### Application:

- Parking areas lighting.
- Warehouse Lighting.
- Industrial workshop lighting.
- Stadium Lighting.
- Airport Lighting.
- Office lighting.



## LED Growth Light



Folding design

### Specification:

| Model              | Power | Size              |
|--------------------|-------|-------------------|
| BB-GKD-400W-G3-D2  |       | L1004*W567*H46mm  |
| BB-GKD-500W-G3-D2  |       | L1004*W720*H46mm  |
| BB-GKD-600W-G3-D2  |       | L1004*W840*H46mm  |
| BB-GKD-800W-G3-D2  |       | L1004*W1128*H46mm |
| BB-GKD-1000W-G3-D2 |       | L1004*W1280*H46mm |
| BB-GKD-1200W-G3-D2 |       | L1004*W1440*H46mm |
| BB-GKD-1500W-G3-D2 |       | L1004*W1600*H46mm |
| BB-GKD-1800W-G3-D2 |       | L1004*W1760*H46mm |



Folding design

### Specification:

| Model             | Power | Size            |
|-------------------|-------|-----------------|
| BB-GKD-300W-G3-D1 |       | L876*W550*H31mm |
| BB-GKD-400W-G3-D1 |       | L730*W606*H31mm |
| BB-GKD-480W-G3-D1 |       | L730*W606*H31mm |



Detachable style

### Specification:

| Model              | Power | Size              |
|--------------------|-------|-------------------|
| BB-GKD-400W-G3-D3  |       | L889*W1128*H34mm  |
| BB-GKD-640W-G3-D3  |       | L699*W1128*H34mm  |
| BB-GKD-720W-G3-D3  |       | L1104*W1128*H34mm |
| BB-GKD-800W-G3-D3  |       | L1104*W1128*H34mm |
| BB-GKD-1000W-G3-D3 |       | L1104*W1128*H34mm |



### Specification:

| Model              | Power | Size             |
|--------------------|-------|------------------|
| BB-GKD-300W-G3-D1  |       | L1804*W550*H40mm |
| BB-GKD-400W-G3-D1  |       | L1804*W550*H46mm |
| BB-GKD-1000W-G3-D1 |       | L1804*W840*H46mm |
| BB-GKD-600W-G3-D1  |       | L1804*W840*H46mm |



### Specification:

| Model              | Power | Size              |
|--------------------|-------|-------------------|
| BB-GKD-400W-G3-D4  |       | L889*W903*H101mm  |
| BB-GKD-600W-G3-D4  |       | L518*W903*H101mm  |
| BB-GKD-800W-G3-D4  |       | L1248*W903*H101mm |
| BB-GKD-1000W-G3-D4 |       | L1145*W903*H101mm |
| BB-GKD-1200W-G3-D4 |       | L1188*W903*H101mm |
| BB-GKD-1500W-G3-D4 |       | L1745*W903*H101mm |
| BB-GKD-1800W-G3-D4 |       | L1863*W903*H101mm |



### Specification:

| Model          | Power | Size            |
|----------------|-------|-----------------|
| BB-GKD-100W-G1 |       | L380*W240*H54mm |
| BB-GKD-200W-G1 |       | L600*W240*H54mm |
| BB-GKD-400W-G1 |       | L800*W480*H54mm |
| BB-GKD-600W-G1 |       | L720*W600*H54mm |



### Specification:

| Model          | Power | Size             |
|----------------|-------|------------------|
| BB-GKD-180W-G2 |       | L808*W531*H3mm   |
| BB-GKD-200W-G2 |       | L908*W198*H103mm |
| BB-GKD-300W-G2 |       | L908*W338*H113mm |



### Specification:

| Model          | Power | Size              |
|----------------|-------|-------------------|
| BB-GKD-640W-G4 |       | L1060*W1202*260mm |



### Specification:

| Model          | Power | Size       |
|----------------|-------|------------|
| BB-GKD-100W-E5 |       | Ø280x164mm |
| BB-GKD-150W-E5 |       | Ø338x167mm |
| BB-GKD-200W-E5 |       | Ø400x164mm |
| BB-GKD-240W-E5 |       | Ø400x172mm |
| BB-GKD-300W-E5 |       | Ø400x200mm |



### Specification:

| Model          | Power | Size          |
|----------------|-------|---------------|
| BB-GKD-800W-G5 |       | 722x315x112mm |

## Key Features:

- Full spectrum light output
- Samsung LED chips
- Ip65 waterproof, Use in moist environment
- Includes remote dimmer
- 0/1-100% knob dimmer
- Added red light for enhanced flowering
- UL listed power supply(IP 67)
- Aluminum alloy with white/black coat
- Energy efficient, low heat output
- No fans or moving parts, silent running
- Excellent heat dissipation
- Easy Installation
- Control multiple units with iLink technology
- Lightweight slimline design

## Installation Method:



## Application:

- Grow tent
- Greenhouse
- Horticulture lighting
- Hydroponic cultivation
- Industry hemp growth
- Marijuana Cannabis lighting
- Indoor planting growth
- Farming plants research



## LED Work Light




### Specification:

| Model      | Power | Size       |
|------------|-------|------------|
| BB-MTD-30W |       | L1202*H339 |
| BB-MTD-50W |       | L1202*H339 |



### Specification:

| Model      | Power | Size       |
|------------|-------|------------|
| BB-MTD-30W |       | L1268*H335 |
| BB-MTD-50W |       | L1268*H335 |



### Specification:

| Model         | Power | Size       |
|---------------|-------|------------|
| BB-MTD-5W-AR  |       | L1262*H339 |
| BB-MTD-18W-AR |       | L1262*H339 |



### Specification:

| Model        | Power | Size          |
|--------------|-------|---------------|
| BB-MTD-5W-M  |       | L110*W47*H553 |
| BB-MTD-10W-M |       | L110*W47*H553 |



### Specification:

| Model         | Power | Size       |
|---------------|-------|------------|
| BB-HUD-200W-Q |       | Ø110*282mm |
| BB-HUD-30W-Q  |       | Ø110*262mm |
| BB-HUD-40W-Q  |       | Ø110*262mm |
| BB-HUD-50W-Q  |       | Ø110*267mm |
| BB-HUD-60W-Q  |       | Ø110*267mm |
| BB-HUD-80W-Q  |       | Ø150*375mm |
| BB-HUD-100W-Q |       | Ø150*375mm |
| BB-HUD-120W-Q |       | Ø150*375mm |
| BB-HUD-150W-Q |       | Ø150*375mm |



### Specification:

| Model         | Power | Size        |
|---------------|-------|-------------|
| BB-HUD-40W-B  |       | H203xØ100mm |
| BB-HUD-100W-B |       | H203xØ180mm |
| BB-HUD-120W-B |       | H218xØ120mm |
| BB-HUD-150W-B |       | H218xØ120mm |



### Specification:

| Model        | Power | Size                    |
|--------------|-------|-------------------------|
| BB-HUD-2X30W |       | H630(mm)-3690(mm)*W1785 |




### Specification:

| Model        | Power | Size                     |
|--------------|-------|--------------------------|
| BB-HUD-2X30W |       | H1813(mm)-3300(mm)*W1200 |

### Key Features:

- Reliability: LED dock light is high impact resistant with appropriate structure design; with polyester powder coated surface; long time use in high and temperature and corrosive environment
- Safety: dust proof and water proof with tightening structure for the loading dock light
- Energy-saving: high efficient semiconductor light-emitting technology. Solar power, zero electricity
- Economy: long lifespan LED SMD; maintenance-free
- Convenience: U-tape bracket Mounting
- Uniqueness: providing excellent optical performance by adopting high reflecting, high transmittance focus lens
- Over 50000 hours lifetime and offer 5 years warranty

### Product Diagram:



- Bracket
- LED Lamp
- M8 screw hole x 4
- 180° rotatable joint
- 330° rotatable joint
- 360° rotatable joint
- Switch
- Receptacle on bracket

### Application:

- Factory Lighting.
- Dock Lighting.
- Warehouse Lighting.
- Goods shelf Lighting.
- Container Lighting.



Adjustable power / color temperature all in one

## All styles as follows:



### Specification:

| Model / Power         | Size       |
|-----------------------|------------|
| BB-LD-30/50/75W       | Φ345x563mm |
| BB-LD-75/100/120/150W | Φ345x563mm |

Adjustable power/Adjustable color temperature all in one  
3 years adjustment: 3000K, 4000K, 5000K.



### Specification:

| Model / Power          | Size       |
|------------------------|------------|
| BB-GKD-60/75/100/120W  | Φ290x174mm |
| BB-GKD-75/100/120/150W | Φ340x181mm |

Adjustable power/Adjustable color temperature all in one  
3 years adjustment: 3000K, 4000K, 5000K.



### Specification:

| Model / Power        | Size          |
|----------------------|---------------|
| GKD-150/200/240/320W | 1210'400'90mm |

Adjustable Power/CCT all in one  
3 years adjustment: 3000K, 4000K, 5000K.



### Specification:

| Model / Power            | Size       |
|--------------------------|------------|
| 30/50/75W-AR-B3          | Φ400x709mm |
| 75W-100W/120W/150W-AR-B3 | Φ400x709mm |

Adjustable Power/CCT all in one  
3 years adjustment: 3000K, 4000K, 5000K.



### Specification:

| Model / Power        | Size         |
|----------------------|--------------|
| BB-LD-50/80/100/120W | 610x250x72mm |

Adjustable power/Adjustable color temperature all in one  
3 years adjustment: 3000K, 4000K, 5000K.



### Specification:

| Model / Power          | Size         |
|------------------------|--------------|
| BB-LD-180/150/200/240W | 610x290x72mm |

Adjustable power/Adjustable color temperature all in one  
3 years adjustment: 3000K, 4000K, 5000K.



### Specification:

| Model / Power       | Size(Lamp) |
|---------------------|------------|
| BB-MTD-30W/50W-2in1 | Φ205x124mm |

Adjustable Power/CCT all in one  
3 years adjustment: 3000K, 4000K, 5000K.



### Specification:

| Model / Power       | Size       |
|---------------------|------------|
| 30/40/50/60W-HJD    | Φ100x250mm |
| 80/100/120/150W-HJD | Φ120x301mm |

Adjustable Power/CCT all in one  
3 years adjustment: 3000K, 4000K, 5000K.



### Specification:

| Model / Power         | Size         |
|-----------------------|--------------|
| BB-CSD-20/30/40/60W   | 262x262x73mm |
| BB-CSD-60/80/100/120W | 362x352x82mm |

Adjustable power/Adjustable color temperature all in one  
3 years adjustment: 3000K, 4000K, 5000K.



### Specification:

| Model / Power        | Size      |
|----------------------|-----------|
| BB-CSD-40/60/80/100W | Φ305x72mm |

Adjustable power/Adjustable color temperature all in one  
3 years adjustment: 3000K, 4000K, 5000K.



### Specification:

| Model / Power     | Size(Lamp)   |
|-------------------|--------------|
| 20/30/40/50W-6in1 | 245x245x85mm |

Adjustable Power/CCT all in one  
3 years adjustment: 3000K, 4000K, 5000K.



### Specification:

| Model / Power         | Size          |
|-----------------------|---------------|
| BB-RSD-20/30/40/60W   | 320x132x115mm |
| BB-RSD-60/80/100/120W | 320x132x115mm |

Adjustable power/Adjustable color temperature all in one  
3 years adjustment: 3000K, 4000K, 5000K.



### Specification:

| Model / Power       | Size          |
|---------------------|---------------|
| BB-RSD-30/45/60/80W | 290x170x130mm |

Adjustable power/Adjustable color temperature all in one  
3 years adjustment: 3000K, 4000K, 5000K.



### Specification:

| Model / Power         | Size      |
|-----------------------|-----------|
| BB-SDD-40/60/100/120W | 270'190mm |

Adjustable power/Adjustable color temperature all in one  
3 years adjustment: 3000K, 4000K, 5000K.



### Specification:

| Model / Power           | Size         |
|-------------------------|--------------|
| BB-CSD-80/100/120/150W  | 420x420x67mm |
| BB-CSD-120/160/200/240W | 540x540x67mm |

Adjustable power/Adjustable color temperature all in one  
3 years adjustment: 3000K, 4000K, 5000K.